



# PROFESSIONAL LIGHTING





OPTIBEAM   
**SAVAGE**

The Optibeam Savage series brings you the brutally powerful auxiliary lights. Thanks to great optical design Savage's almost scary light output stays in the desired range. The revolutionary Streetshine Ambient parking solution gives the Savages a whole new kind of bold, eye-catching look. You can choose the color of the position light between orange and white. This function can be easily controlled with a separate cable. The Streetshine ambient position light solution is unique and together with the top-level high-beam solution Savage sets completely new standard for auxiliary lights. The Savage product family includes round auxiliary lights in three sizes (5", 7", 9") and five different sized light bars. (12", 20", 30", 40", 50")

The versatile innovative series of auxiliary lights is suitable for both professional heavy traffic and normal car use.



**OPTIBEAM SAVAGE 5"**  
 White parking light.  
 Chrome frame included.



**OPTIBEAM SAVAGE 7"**  
 Amber / white.  
 Chrome frame included.



**OPTIBEAM SAVAGE 9"**  
 Amber / white.  
 Chrome frame included.

<b>Input voltage</b>	9-36 V	9-36 V	9-36 V
<b>Power consumption</b>	1.80 A @ 13,7 V	3.66 A @ 13,7 V	4.55 A @ 13,7 V
<b>LED</b>	2 x LED	6 x Osram	8 x Osram
<b>Tested lumens</b>	1580 lm	3640 lm	5500 lm
<b>Color temperature</b>	5000 K	5000 K	5000 K
<b>1 lux distance</b>	1 lux @ 308 m	1 lux @ 345 m	1 lux @ 431 m
<b>Cable / connection</b>	220 cm, 3-pin, DT-plug	220 cm, 4-pin, DT-plug	220 cm, 4-pin, DT-plug
<b>Size (W x H x D)</b>	Ø 127 x 78 mm	Ø 178 x 78 mm	Ø 229 x 89 mm
<b>Approvals</b>	R112, ref. 30, R10, R7	R112, ref. 37.5, R10, R7	R112, ref. 45, R10, R7

**1605-NS2073**

**1605-NS2074**

**1605-NS2075**



### OPTIBEAM SAVAGE 12"

307 mm. Double up.  
Amber / white parking light.

### OPTIBEAM SAVAGE 20"

549 mm. Double up.  
Amber / white parking light.

### OPTIBEAM SAVAGE 30"

791 mm. Double up.  
Amber / white parking light.

<b>Input voltage</b>	9-36 V	9-36 V	9-36 V
<b>Power consumption</b>	3.72 A @ 13,7 V	7.79 A @ 13,7 V	11.56 A @ 13,7 V
<b>LED</b>	4 x LED	8 x LED	12 x LED
<b>Tested lumens</b>	2760 lm	5610 lm	10065 lm
<b>Color temperature</b>	5700 K	5700 K	5700 K
<b>1 lux distance</b>	1 lux @ 387 m	1 lux @ 517 m, R112 1 lux @ 382 m	1 lux @ 588 m, R112 1 lux @ 342 m
<b>Cable / connection</b>	220 cm	220 cm, 4-pin, DTP-plug	220 cm, 4-pin, DTP-plug
<b>Size (W x H x D)</b>	307 x 81 (109) x 87 mm	549 x 81 (109) x 87 mm	791 x 81 (109) x 87 mm
<b>Approvals</b>	R112, ref. 40, R10	R112, ref. 40, R10	R112, ref. 40, R10
	<b>1605-NS2080</b>	<b>1605-NS2081</b>	<b>1605-NS2082</b>



### OPTIBEAM SAVAGE 40"

1034 mm. Double up. Amber / white parking light.

### OPTIBEAM SAVAGE 50"

1276 mm. Double up. Amber / white parking light.

<b>Input voltage</b>	9-36 V	9-36 V
<b>Power consumption</b>	25.00 A @ 13,7 V	25.00 A @ 13,7 V
<b>LED</b>	16 x LED	20 x LED
<b>Tested lumens</b>	12000 lm	14000 lm
<b>Color temperature</b>	5700 K	5700 K
<b>1 lux distance</b>	1 lux @ 623 m, R112: 1 lux @ 330 m	1 lux @ 559 m, R112: 1 lux @ 292 m
<b>Cable / connection</b>	220 cm, 4-pin, DTP-plug	220 cm, 4-pin, DTP-plug
<b>Size (W x H x D)</b>	1034 x 81 (109) x 87 mm	1276 x 81 (109) x 87 mm
<b>Approvals</b>	R112, ref. 40, R10	R112, ref. 40, R10
	<b>1605-NS2083</b>	<b>1605-NS2084</b>





**OPTIBEAM  
SUPER CAPTAIN DUAL 600**

525 mm. Double up. Amber / white parking light.

**OPTIBEAM  
SUPER CAPTAIN DUAL 800**

800 mm. Double up. Amber / white parking light.

**SUPER CAPTAIN DUAL RAGE 600**

525 mm. Double up. Amber / white parking light. Super Captain Rage 600 is the most powerful and ultra long distance light bar in Optibeam range

<b>Input voltage</b>	9-36 V	9-36 V	9-36 V
<b>Power consumption</b>	15.79 A @ 13,7 V	22.45 A @ 13,7 V	30 A @ 13,7 V
<b>LED</b>	24 x LED	36 x LED	24 x LED
<b>Tested lumens</b>	19896 lm	30900 lm	27000 lm
<b>Color temperature</b>	5000 K	5000 K	6000 K
<b>1 lux distance</b>	1 lux @ 604 m, R112: 1 lux @ 431 m	1 lux @ 725 m, R112: 1 lux @ 374 m	1 lux @ 1300 m
<b>Cable / connection</b>	220 cm 2-pin, DTP-plug	220 cm 2-pin, DTP-plug	220 cm
<b>Size (W x H x D)</b>	525 x 68 x 80 mm	769 x 68,5 x 79,5 mm	525 x 68 x 80 mm
<b>Approvals</b>	R112, ref. 50, R10	R112, ref. 40, R10	TOO MUCH LIGHT TO BE E-APPROVED
	<b>1605-NS2085</b>	<b>1605-NS2086</b>	<b>1605-NS2089</b>



**SE7EN**

**OPTIBEAM SE7EN**

Double up. Amber / white parking light (both with their own cable). U- and pedestal bracket.



**NIN9**

**OPTIBEAM NIN9**

Double up. Amber / white parking light (both with their own cable). U- and pedestal bracket.

<b>Input voltage</b>	9-32 V	9-36 V
<b>Power consumption</b>	11.16 A @ 13,7 V	11.16 A @ 13,7 V
<b>LED</b>	8 x LED	8 x LED
<b>Tested lumens</b>	9159 lm	11400 lm
<b>Color temperature</b>	5500 K	5500 K
<b>1 lux distance</b>	1 lux @ 500 m, R112: 1 lux @ 198 m	1 lux @ 580 m, R112: 1 lux @ 245 m
<b>Cable / connection</b>	85 cm, 4-pin, DT-plug	85 cm, 4-pin. DT-plug
<b>Size (W x H x D)</b>	Ø 178 x 83 mm	Ø 220 x 83 mm
<b>Approvals</b>	R148 / 149, ref. 30, R10	R148 / 149, ref. 30, R10
	<b>1605-NS2087</b>	<b>1605-NS2088</b>

OPTIBEAM  
**OCTAX**

It's hard to reinvent the wheel, but we decided that the work light could be reinvented. The result is the eye-catchingly beautiful model series OctaX ©. With completely new reflector technology and the latest LED units implemented this series is globally new to the lighting market. Despite everything new, these lights are made for hard use with solid professionalism. The built-in DT connector, full protection against EMC interference, RST mounts and other features make this model range an unrivaled alternative for different lighting needs. There are three different power options for work machines as well as specially built vehicles. The measured light output is 4600 lm (OctaX 4.0) up to 7400 lm (OctaX 8.0) and the light pattern is very wide in all versions. The color temperature of all models is a pleasant 5500 K, which works well in a variety of applications and environments.



**OPTIBEAM OCTAX 4.0**  
4600 lm.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	3.50 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	4600 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	115 x 115 (134) x 81 mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300720**

**OPTIBEAM OCTAX 6.0**  
6100 lm.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	5.30 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	6100 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	115 x 115 (134) x 81 mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300721**

**OPTIBEAM OCTAX 8.0**  
7400 lm.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	6.80 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	7400 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	115 x 115 (134) x 81 mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300722**

**OPTIBEAM OCTAX 6.0 AMBIENT**  
6100 lm. Amber / white / red  
parking light.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	5.30 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	6100 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	115 x 115 (134) x 81 mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300729**

**OPTIBEAM OCTAX 5.0**  
4400 lm.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	4.80 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	4410 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	90 x 90 (107) x 57 (65) mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300730**

**OPTIBEAM OCTAX 5.0 AMBIENT**  
4410 lm. Amber / white / red  
parking light.

<b>Input voltage</b>	9-36 V
<b>Power consumption</b>	4.80 A @ 13,7 V
<b>LED</b>	4 x high power LED
<b>Tested lumens</b>	4410 lm
<b>Color temperature</b>	5500 K
<b>1 lux distance</b>	IP68
<b>Cable / connection</b>	Integrated DT plug
<b>Size (W x H x D)</b>	90 x 90 (107) x 57 (71) mm
<b>Approvals</b>	R10, CISPR25 Class 3

**1603-300731**

# DARK PHANTOM LIGHTBAR



## OPTIBEAM DARK PHANTOM LIGHTBAR

400 mm. 8 different flash patterns. Brackets, cigarette lighter plug, magnet holders

Input voltage	12-24 V
Power consumption	1.1 A @ 12 V / 0.75 A @ 24 V
LED	36 x LED
Cable	3,5 m
Size (W x H x D)	400 x 59 (105) x 300 mm
Approvals	ECE R65 CLASS 2, ECE R10

**1603-140931**

## OPTIBEAM DARK PHANTOM LIGHTBAR

600 mm. 11 different flash patterns. Brackets, magnet holders, control panel

Input voltage	12-24 V
Power consumption	1.68 A @ 12 V / 1.10A @ 24 V
LED	60 x LED
Cable	3,5 m
Size (W x H x D)	600 x 59 (105) x 300 mm
Approvals	ECE R65 CLASS 2, ECE R10

**1603-140932**

## OPTIBEAM DARK PHANTOM LIGHTBAR

800 mm. 11 different flash patterns. Brackets, magnet holders, control panel

Input voltage	12-24 V
Power consumption	2.10 A @ 12 V / 1.25 A @ 24 V
LED	72 x LED
Cable	3,5 m
Size (W x H x D)	800 x 59 (105) x 300 mm
Approvals	ECE R65 CLASS 2, ECE R10

**1603-140933**

## OPTIBEAM DARK PHANTOM LIGHTBAR

1000 mm. 11 different flash patterns. Brackets, control panel.

Input voltage	12-24 V
Power consumption	2.15 A @ 12 V / 1.42 A @ 24 V
LED	84 x LED
Cable	3,5 m
Size (W x H x D)	1000 x 59 (105) x 300 mm
Approvals	ECE R65 CLASS 2, ECE R10

**1603-140934**

## OPTIBEAM DARK PHANTOM LIGHTBAR

1200 mm. 11 different flash patterns. Brackets, control panel.

Input voltage	12-24 V
Power consumption	2.68 A @ 12 V / 1.58A @ 24 V
LED	96 x LED
Cable	3,5 m
Size (W x H x D)	1200 x 59 (105) x 300mm
Approvals	ECE R65 CLASS 2, ECE R10


**1603-140935**

## OPTIBEAM DARK PHANTOM LIGHTBAR

1400 mm. 11 different flash patterns. Brackets, control panel.

Input voltage	12-24 V
Power consumption	3.15 A @ 12 V / 1.77A @ 24 V
LED	108 x LED
Cable	3,5 m
Size (W x H x D)	1400 x 59 (105) x 300 mm
Approvals	ECE R65 CLASS 2, ECE R10

**1603-140936**

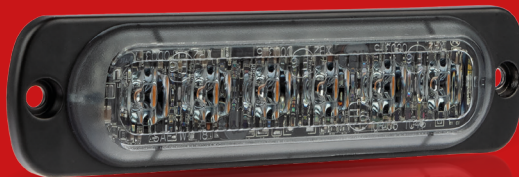

**OPTIBEAM**   
**DARK PHANTOM**

**OPTIBEAM Dark Phantom LM6**  
Amber, dark optics, 29 different flash patterns.

Input voltage	12-24 V
Power consumption	1.88 A @ 13,7 V
LED	6 x LED
IP rating	IP68
Cable	250 mm
Size (W x H x D)	113 x 28 x 9 mm
Approvals	ECE R65 Class 1, ECE R10

**1603-300705**

Optibeam Dark Phantom LM6 warning light is full of black energy in the most popular size of its category. Dark tinted optics design guarantee very attractive installations on work machines and commercial vehicles. Low-profile design, only 9 mm thick reduces the risks of physical damage and facilitates installation. LM6 is completely water, dust, and vibration protected and approved in R65 Class 1.



[OPTIBEAMLIGHTS.COM](http://OPTIBEAMLIGHTS.COM)